

FPT Splice closure



Excellent pressure resistance



Clamping rubber seal

Model	FPT - 9401
Fiber Tray Capacity	-
Protection grade	IP68
Box material	modified polymer plastic
Weight	2.1 - 2.3 kg
Cable Diameter	under 18 mm
Installation Type	Outdoor
Adapters	SC, LC, E2000

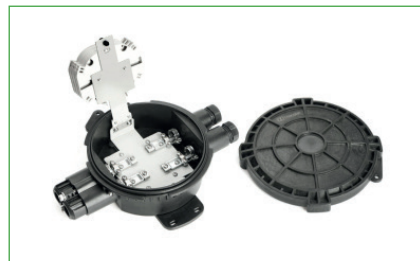
	Box size
Width	295 mm
Height	220 mm
Depth	90 mm

Professional Splice closure used in FTTx projects. Used for outdoor installations (Manhole, Wall/ Pole-mounted)

Easy to use and install, provides security for fiber optic connections. Resistant to pressure, twisting and crushing. Suitable for usage with the various optical cables. Excellent sealing performance and compact appearance.

Can be equipped with a powerful RFID card used for tagging underground cable or pipe infrastructures, manholes, access points and more.

Turtlebox



Size	Article Number	Splices
24	27-001.62	Heatshrink
24	27-001.62.08	Crimp



Turtlebox empty



Size in mm	Article Number
-	27-001.62.07







Standard Sealings

Round Seals	Seal gasket parts	Cable size
14#X2 PCS.		ø 12 - 17,5 mm
41#X2 PCS.		ø 8 - 12,0 mm

Oval Seals	Seal gasket parts	Cable size
40#X1 PCS.		ø 10- 16,0 mm

Optional Sealings

Round Seals	Seal gasket parts	Cable size
20#		4 x(ø 5-7 mm)
36#		2 x(4,5*8,2 mm)
18#		8 x(ø 3-5 mm)
19#		8 x 8 figure soft ø5 mm

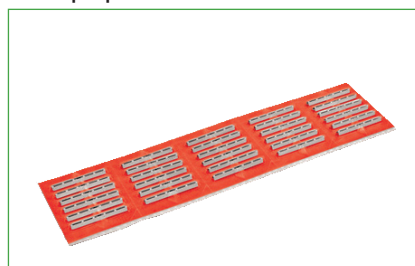
Oval Seals	Seal gasket parts	Cable size
74#		ø 6 - 8 mm

Heatshrink splice seams



Size in mm	Article Number	MOQ
1,0x 45	27-010.1605	100pcs

Crimp splice seams



Size in mm	Article Number	MOQ
30x3x1,2	27-010.1614	150pcs